

CAST IRON Y-TYPE STRAINER


Available Medium: Water, Steam, Petroleum Products.

Working Temperature: $-20^{\circ}\text{C} \sim 200^{\circ}\text{C}$

Flange Dimensions: DIN2533

Face to Face Dimensions: DIN3202-F1

Working Pressure: PN16/10

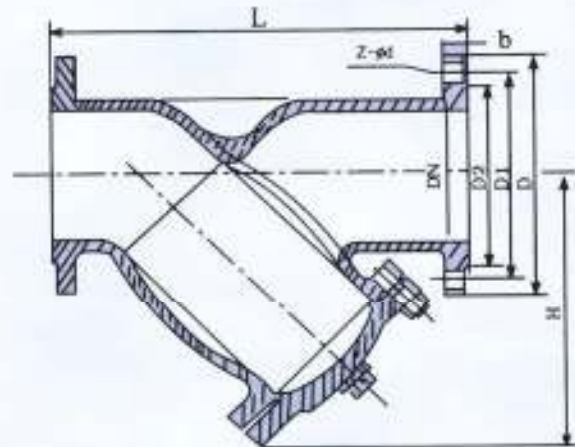

MATERIALS	
PARTS NAME	MATERIAL
BODY / BONNET	GG25
SCREEN	SS304
BLOWOFF PLUG	GGG40/50
GASKET	GRAPHITE
BOLT / NUT	CARBON STEEL

DIMENSIONS								
DN	L	D	D1	D2	b	Z- Φ d0	H	WT(kg)
15	130	95	65	47	14	4- Φ 14	72	2.1
20	150	105	75	58	16	4- Φ 14	80	3.3
25	160	115	85	68	16	4- Φ 14	90	4.6
32	180	140	100	78	18	4- Φ 18	105	6.0
40	200	150	110	88	18	4- Φ 18	115	7.2
50	230	165	125	102	18	4- Φ 18	170	11.5
65	290	185	145	122	18	4- Φ 18	205	16.5
80	310	200	160	138	20	8- Φ 18	210	18.9
100	350	220	180	158	20	8- Φ 18	235	24.7
125	400	250	210	188	22	8- Φ 18	270	36.1
150	480	285	240	212	22	8- Φ 23	310	50.2
200	600	340	295	268	24	12- Φ 23	290	88.8
250	730	405	355	320	30	12- Φ 27	430	135.5
300	850	460	410	370	30	12- Φ 27	500	206.5
350	980	520	470	438	34	16- Φ 27	570	293.5